



**BAILIDACN**


**LED LIGHT BAR**

**BAILIDA CO.,Ltd**



## ▶▶▶ LP SERIES LP系列

### LP1-01 Light Bar

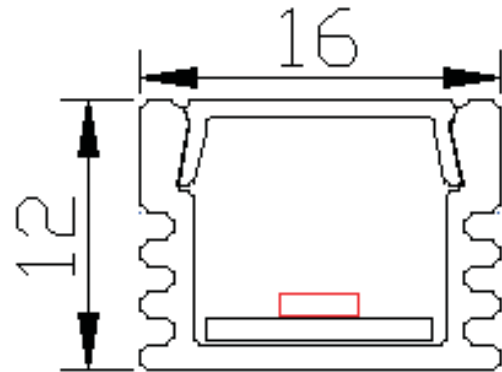


#### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-01 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-01-10T4	4W	120	320lm	2700K	1000mmx16mmx12mm
LP1-01-10T8	8W	120	560lm	3000K	1000mmx16mmx12mm
LP1-01-20T8	8W	240	640lm	4000K	2000mmx16mmx12mm
LP1-01-20T16	16W	240	1120lm	5000K	2000mmx16mmx12mm

# ▶▶▶ LP SERIES LP系列

## LP1-02 Light Bar

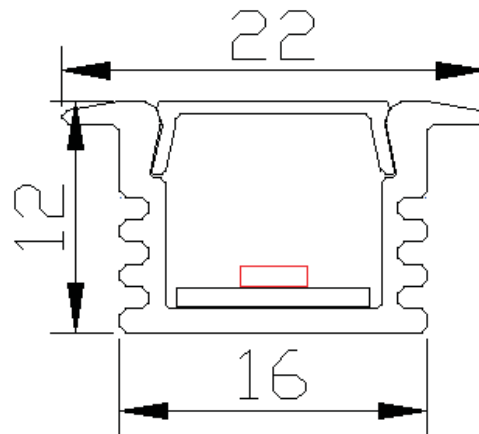


### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-02 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-02-10T4	4W	120	320lm	2700K	1000mmx22mmx12mm
LP1-02-10T8	8W	120	560lm	3000K	1000mmx22mmx12mm
LP1-02-20T8	8W	240	640lm	4000K	2000mmx22mmx12mm
LP1-02-20T16	16W	240	1120lm	5000K	2000mmx22mmx12mm

# ▶▶▶ LP SERIES LP系列

## LP1-03 Light Bar

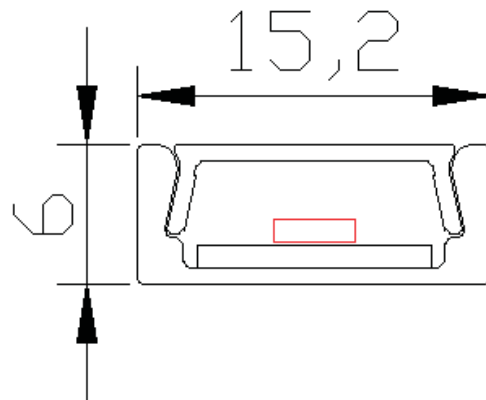


### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-03 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-03-10T4	4W	120	320lm	2700K	1000mmx15.2mmx6mm
LP1-03-10T8	8W	120	560lm	3000K	1000mmx15.2mmx6mm
LP1-03-20T8	8W	240	640lm	4000K	2000mmx15.2mmx6mm
LP1-03-20T16	16W	240	1120lm	5000K	2000mmx15.2mmx6mm

# ▶▶▶ LP SERIES LP系列

## LP1-04 Light Bar

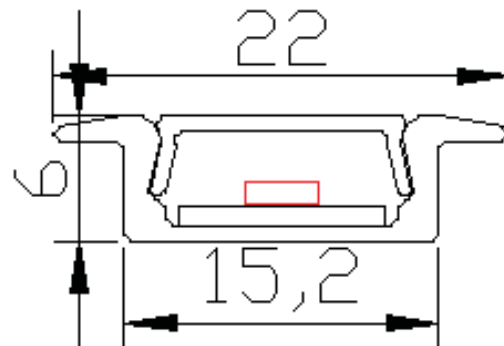

### Product features


- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-04 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-04-10T4	4W	120	320lm	2700K	1000mmx22mmx6mm
LP1-04-10T8	8W	120	560lm	3000K	1000mmx22mmx6mm
LP1-04-20T8	8W	240	640lm	4000K	2000mmx22mmx6mm
LP1-04-20T16	16W	240	1120lm	5000K	2000mmx22mmx6mm



## ▶▶▶ LP SERIES LP系列

### LP1-05 Light Bar

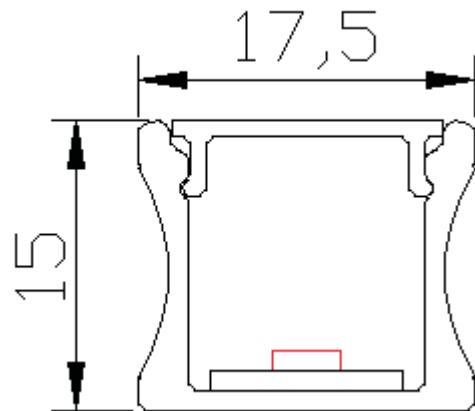


#### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-05 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-05-10T4	4W	120	320lm	2700K	1000mmx17.5mmx15mm
LP1-05-10T8	8W	120	560lm	3000K	1000mmx17.5mmx15mm
LP1-05-20T8	8W	240	640lm	4000K	2000mmx17.5mmx15mm
LP1-05-20T16	16W	240	1120lm	5000K	2000mmx17.5mmx15mm

## ▶▶▶ LP SERIES LP系列

### LP1-06 Light Bar

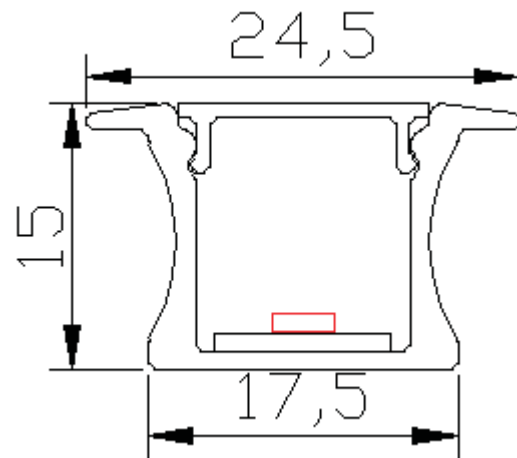

#### Product features


- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-06 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-06-10T4	4W	120	320lm	2700K	1000mmx24.5mmx15mm
LP1-06-10T8	8W	120	560lm	3000K	1000mmx24.5mmx15mm
LP1-06-20T8	8W	240	640lm	4000K	2000mmx24.5mmx15mm
LP1-06-20T16	16W	240	1120lm	5000K	2000mmx24.5mmx15mm



## ▶▶▶ LP SERIES LP系列


### LP1-07 Light Bar

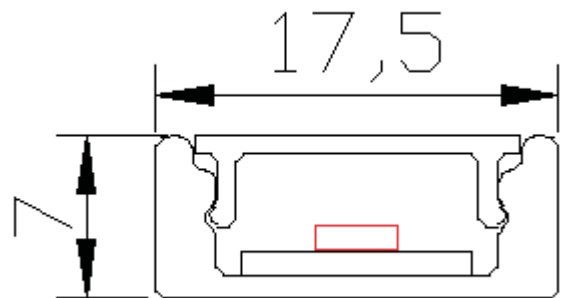

#### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-07 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-07-10T4	4W	120	320lm	2700K	1000mmx17.5mmx7mm
LP1-07-10T8	8W	120	560lm	3000K	1000mmx17.5mmx7mm
LP1-07-20T8	8W	240	640lm	4000K	2000mmx17.5mmx7mm
LP1-07-20T16	16W	240	1120lm	5000K	2000mmx17.5mmx7mm

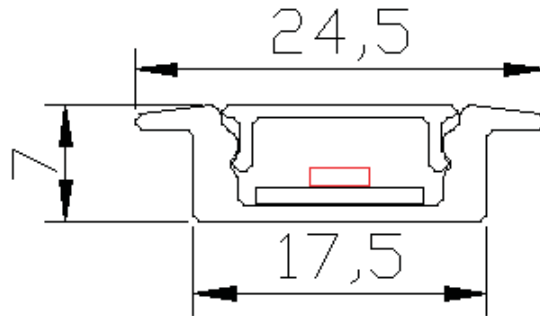



**Product features**

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1-08 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1-08-10T4	4W	120	320lm	2700K	1000mmx24.5mmx7mm
LP1-08-10T8	8W	120	560lm	3000K	1000mmx24.5mmx7mm
LP1-08-20T8	8W	240	640lm	4000K	2000mmx24.5mmx7mm
LP1-08-20T16	16W	240	1120lm	5000K	2000mmx24.5mmx7mm

## ▶▶▶ LP SERIES LP系列

### LP2-01 Light Bar

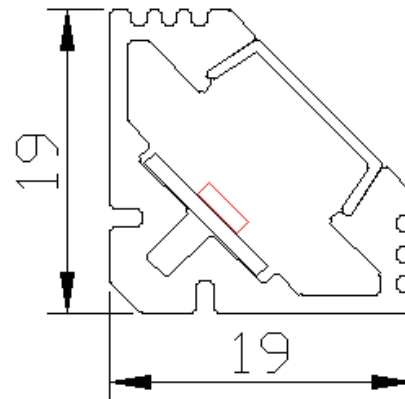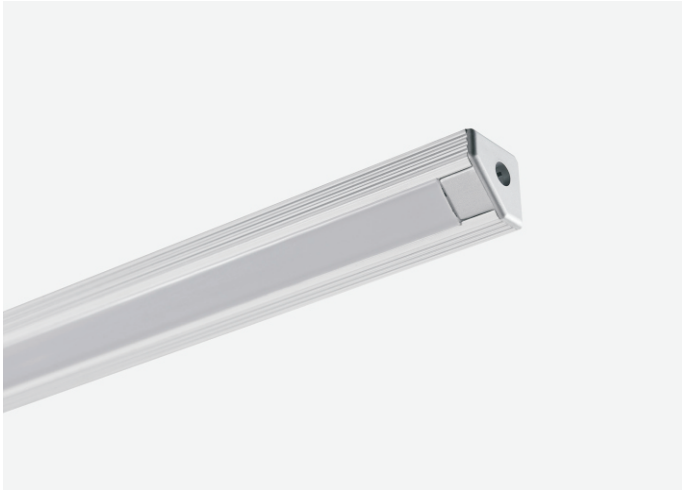


#### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP2-01 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP2-01-10T4	4W	120	320lm	2700K	1000mmx19mmx19mm
LP2-01-10T8	8W	120	560lm	3000K	1000mmx19mmx19mm
LP2-01-20T8	8W	240	640lm	4000K	2000mmx19mmx19mm
LP2-01-20T16	16W	240	1120lm	5000K	2000mmx19mmx19mm

# ▶▶▶ LP SERIES LP系列

## LP2-02 Light Bar

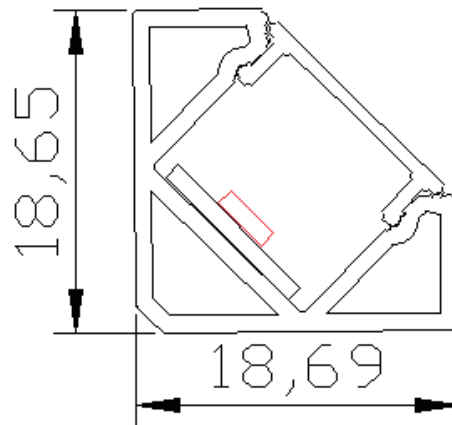


### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP2-02 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP2-02-10T4	4W	120	320lm	2700K	1000mmx19mmx19mm
LP2-02-10T8	8W	120	560lm	3000K	1000mmx19mmx19mm
LP2-02-20T8	8W	240	640lm	4000K	2000mmx19mmx19mm
LP2-02-20T16	16W	240	1120lm	5000K	2000mmx19mmx19mm

# ▶▶▶ LP SERIES LP系列

## LP2-04 Light Bar

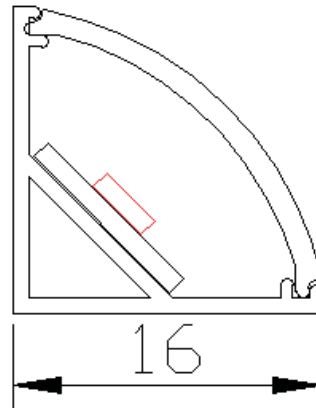


### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP2-04 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP2-04-10T4	4W	120	320lm	2700K	1000mmx16mmx16mm
LP2-04-10T8	8W	120	560lm	3000K	1000mmx16mmx16mm
LP2-04-20T8	8W	240	640lm	4000K	2000mmx16mmx16mm
LP2-04-20T16	16W	240	1120lm	5000K	2000mmx16mmx16mm

# ▶▶▶ LP SERIES LP系列

## LP1911 Light Bar

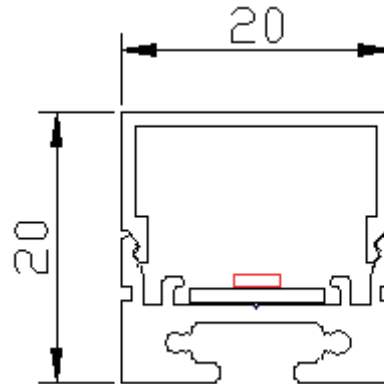

### Product features


- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP1911 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP1911-10T4	4W	120	320lm	2700K	1000mmx20mmx20mm
LP1911-10T8	8W	120	560lm	3000K	1000mmx20mmx20mm
LP1911-20T8	8W	240	640lm	4000K	2000mmx20mmx20mm
LP1911-20T16	16W	240	1120lm	5000K	2000mmx20mmx20mm



# ▶▶▶ LP SERIES LP系列

## LP2814 Light Bar

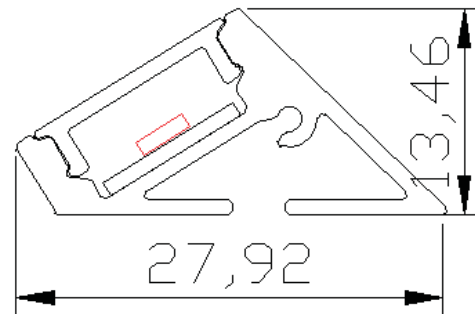

### Product features

- 1, the lamp body material adopts 6063-T5 aluminum alloy anode radiator, the surface is strong and durable and not easy to change color and scratch
- 2, SABIC PC light expansion material PC cover, high transmittance, light uniformity, anti glare, not easy to turn yellow
- 3, Adopt the 2835LED OSRAM light source, high luminous efficiency, Color rendering index is more than 85, Color temperature has 2700k, 3000K, 4000K, 5000K optional
- 4, input voltage DC24V,
- 5, optional intelligent control components, such as microwave induction control, light control, voice control, DALI, WiFi or Bluetooth in wireless system
- 6, life is more than 30000 hours, a small decline, reduce maintenance costs,
- 7, the product through CCC, cETLs, CE, ROHS certification
- 8, LP2814 lamp can realize continuous light without interruption,
- 9, protection class: IP24

Item number	Power	LED	Flux(lm)	TCC	Dimension
LP2814-10T4	4W	120	320lm	2700K	1000mmx28mmx14mm
LP2814-10T8	8W	120	560lm	3000K	1000mmx28mmx14mm
LP2814-20T8	8W	240	640lm	4000K	2000mmx28mmx14mm
LP1814-20T16	16W	240	1120lm	5000K	2000mmx28mmx14mm